



**CMO VALVES**  
manufacturing the valve you need

# 12A SERIES



## FABRICATION RANGE

*RESILIENT SEAT GATE VALVES*  
*THREADED ENDS*

### UTILIZATION:

- Threaded ends resilient seat gate valves, used for drinking water connections, irrigation, civil facilities, etc.
- It has minimum head loss, and it is 100% watertight, full bore and repackable under pipeline pressure.



# 12 - SERIES

## THREADED ENDS

### RESILIENT SEAT GATE VALVES




#### GENERAL FEATURES:

- Minimum head loss.
- Full bore.
- Repackable under pipeline pressure.
- 100% watertight.
- Bidirectional flow.
- Threaded connection.
- Guided gate to ensure the correct sealing.
- Bolts protected against environmental conditions.
- WRAS certificate for drinking water.
- Working temperature between -10°C and 90°C.

#### STANDARDS APPLIED:

- Design according to DIN 3352.
- Hydrostatic tests according to EN 12266-1, class A.
- EC Directive.

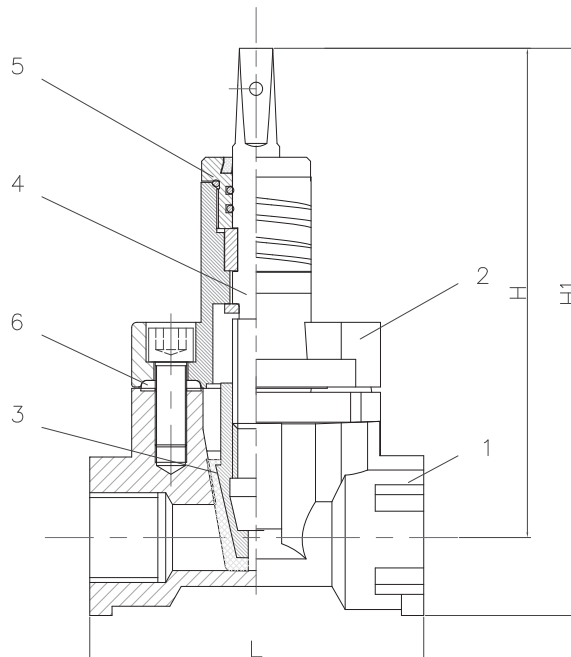

#### DIMENSIONS

DN	L	H	H1
20	122	175	201
25	127	185	214
32	127	190	225
40	154	235	274
50	154	250	294

#### DESCRIPTION

<b>1</b>	<b>BODY</b>	GJS500
<b>2</b>	<b>BONNET</b>	GJS500
<b>3</b>	<b>GATE</b>	BRASS + EPDM
<b>4</b>	<b>SHAFT</b>	AISI 420
<b>5</b>	<b>NUT</b>	BRASS
<b>6</b>	<b>GASKET</b>	EPDM
	<b>BOLTS</b>	STEEL 8.8
	<b>PAINTING RAL 5015</b>	Epoxi 250 µm

The images and drawings are non contractual.  
The specifications of the shown products could vary without previous notice.